



## Product technical sheet

# QUBIX 2503



4 - 14 years



33 kids



42,3 m<sup>2</sup>



## Material specification

- Hot-dip galvanized and powder coated construction of 140x140 mm profile,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Side panels made of durable HPL plate, resistant to weather conditions,
- Stainless steel tube slide,
- Moving elements made of durable HPL plate, resistant to weather conditions,
- Spherical windows made of polycarbonate,
- Musical panels made of stainless steel pipes, with a paddle made of certified, safe rubber attached,
- "Talking pipe" - a pipe made of hot-dip galvanized and powder-coated steel,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel screws and/or screws covered with plastic caps,



### Facilitating disability



sound stimulation



shelters



integration



### Intellectual development



manipulation



music



thinking



### Physical development



sliding



climbing





**1**  
number of  
slides



**2**  
number of  
interactive  
elements



**2**  
number of activity  
elements

## Product technical sheet

# QUBIX 2503


### Product data

Length	745 cm
Width	315 cm
Total height	450 cm
Age group	4 - 14 years
Number of users	33 kids
Safety zone	42,3 m <sup>2</sup>
Free fall height	150 cm
tube slide platform height	220 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	216 kg
Dimensions of the largest part	498x327x86 cm
Availability of spare parts	YES
Installation time	4 h



Data is subject to change without prior notice.

### Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

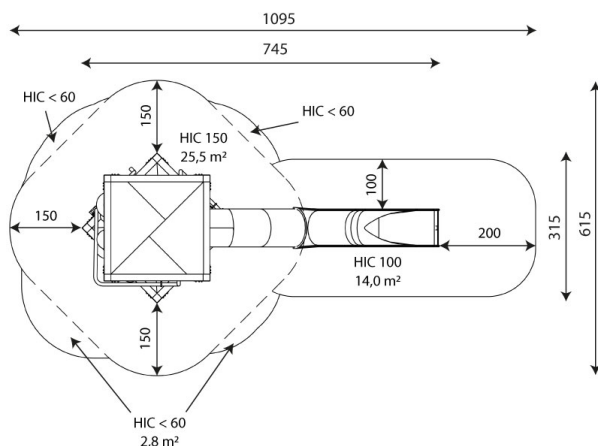

42,3 m<sup>2</sup>

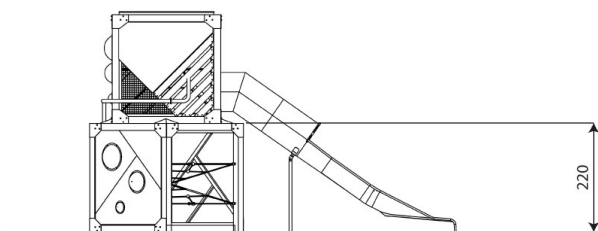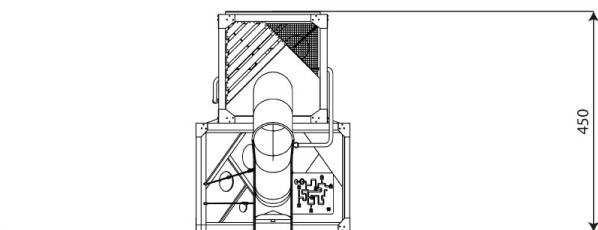

### Guarantee

**30**

30 year guarantee -  
Structural strength of steel  
and stainless steel  
components

**15**

15 year guarantee -  
Structural failure of steel  
and stainless steel, for  
dynamic equipment

**10**

10 year guarantee - Structural  
failure of high density  
polyethylene and high  
pressure laminates  
components

**5**

5 year guarantee - Corrosion of stainless  
steel and hot dip galvanized and powder  
coated components; against bark beetles  
and rot in case of wooden structural  
elements

Detailed information in the guarantee card

**Vinci Group Sp. z o.o.**  
Seminarnyja 9 Street  
99-400 Łowicz

VAT: 534-250-14-46  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		150

## Product technical sheet

# QUBIX 2503

### Amount of safe surface corresponding with free fall height:

HIC <60 2,8 m<sup>2</sup>

HIC 100 14,0 m<sup>2</sup>

HIC 150 25,5 m<sup>2</sup>

Data is subject to change without prior notice.

