


# SOLO 0841



1 - 8 years

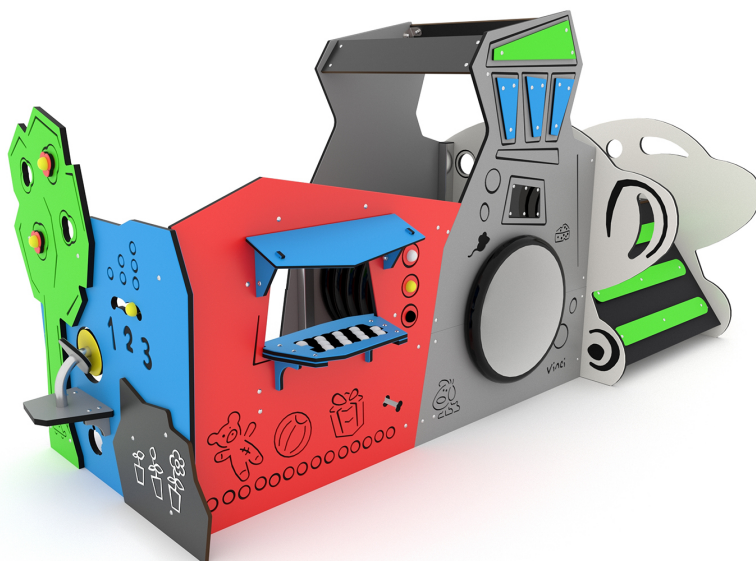

13 kids



29,4 m<sup>2</sup>



## Material specification

- Hot-dip galvanized and stainless steel construction elements,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Side panels made of durable HDPE plate, resistant to weather conditions
- Slides made of stainless steel,
- Drawing board made of durable HPL plate, resistant to weather conditions,
- Double wall tube passage made of polypropylene,
- Seats made of durable HDPE plate, resistant to weather conditions,
- Stainless steel bars,
- Screws covered with plastic caps and/or stainless steel screws,



**Facilitating disability**



easy access



integration



**Intellectual development**



manipulation



thinking



**Physical development**



sliding



climbing



crawling





**1**  
number of  
slides



**5**  
number of  
interactive  
elements



**1**  
number of activity  
elements

## Product technical sheet

# SOLO 0841




### Product data

|                                |                     |
|--------------------------------|---------------------|
| Length                         | 378 cm              |
| Width                          | 199 cm              |
| Total height                   | 144 cm              |
| Age group                      | 1 - 8 years         |
| Number of users                | 13 kids             |
| Safety zone                    | 29,4 m <sup>2</sup> |
| Free fall height               | <60 cm              |
| The height of the platforms    | 59 cm               |
| In accordance with norm EN     | 1176-1:2017         |
| Weight of the heaviest part    | 92 kg               |
| Dimensions of the largest part | 211x100x100 cm      |
| Availability of spare parts    | YES                 |
| Installation time              | 5,5 h               |

Data is subject to change without prior notice.

### Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

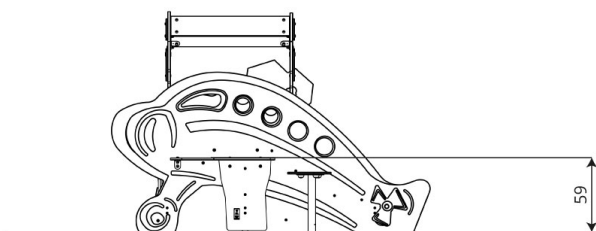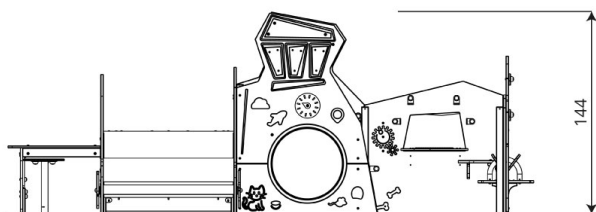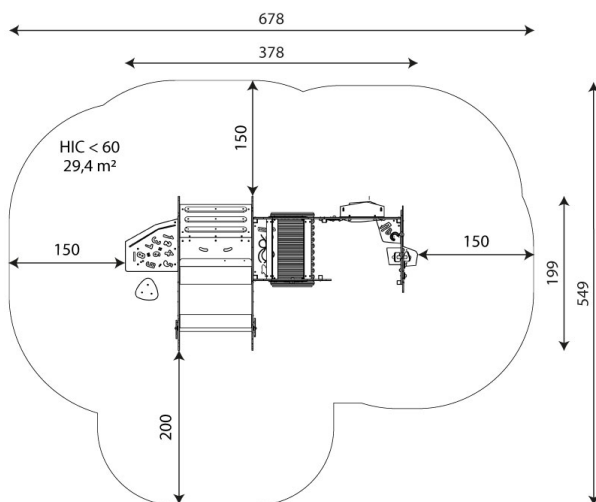

### Guarantee

**30**

30 year guarantee -  
Structural strength of steel  
and stainless steel  
components

**15**

15 year guarantee -  
Structural failure of steel  
and stainless steel, for  
dynamic equipment

**10**

10 year guarantee - Structural  
failure of high density  
polyethylene and high  
pressure laminates  
components

**5**

5 year guarantee - Corrosion of stainless  
steel and hot dip galvanized and powder  
coated components; against bark beetles  
and rot in case of wooden structural  
elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 100                       |

## Product technical sheet

# SOLO 0841

### Amount of safe surface corresponding with free fall height:

HIC <60 20,1 m<sup>2</sup>

HIC 100 9,3 m<sup>2</sup>

Data is subject to change without prior notice.

