



### **Product technical sheet**

# **RECYCLED RC1401**







1 - 8 years

4 kids

13,8 m<sup>2</sup>



### **Material specification**

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite,
- The platform is made of recycled HDPE panel, resistant to weather conditions
- Roofs and side panels made of recycled HDPE plates, resistant to weather conditions, green HDPE panels made of 100% recycled materials, e.g. ocean waste such as fishing nets and ropes
- Manipulative panels made of recycled HDPE plates, resistant to weather conditions, green HDPE panels made of 100% recycled, e.g. ocean waste such as fishing nets and ropes,
- Stainless steel bars,
- Screws covered with plastic caps and/or stainless steel screws,



#### **Facilitating disability**



easy access



integration



#### Intellectual development



manipulation



thinking



### **Physical development**



hiding





rest







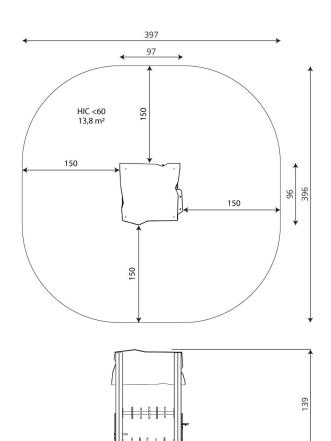



### **Product technical sheet**

# **RECYCLED RC1401**

#### **Product data**

Length	97 cm	
Width	96 cm	
Total height	139 cm	
Age group	1 - 8 years	
Number of users	4 kids	
Safety zone	13,8 m2	
Free fall height	< 60 cm	
In accordance with norm EN	1176-1:2017	
Weight of the heaviest part	10 kg	
Dimensions of the largest part	180x9x9 cm	
Availability of spare parts	YES	
Installation time 2 h		

Data is subject to change without prior notice.

### **Additional information**

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;

### Guarantee



30 year guarantee -Structural strength of steel and stainless steel components



15 year guarantee -Structural failure of steel and stainless steel, for dynamic equipment



10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components



5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



VAT: 534-250-14-46 PHONE: +48 42 203 24 99 ext. 26 M: +48 793 404 991





## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A.C.)	bark (A,C)  Particle size from 20 to 80  40	30	≤200
bark (A,C)		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		< 60

### **Product technical sheet**

# **RECYCLED RC1401**

Amount of safe surface corresponding with free fall height:

HIC <60 13,8 m<sup>2</sup>

Data is subject to change without prior notice.

