


# RECYCLED RC1460



1 - 8 years

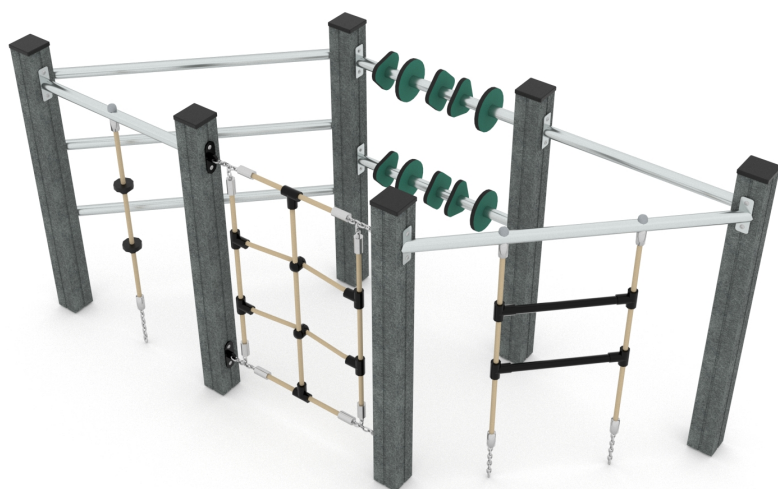

7 kids



16.7 m<sup>2</sup>

## Material specification

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite,
- Manipulative panels made of recycled HDPE plates, resistant to weather conditions, green HDPE panels made of 100% recycled, e.g. ocean waste such as fishing nets and ropes,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Ladders made of steel ropes in polypropylene braid and rungs made of synthetic material,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel bars,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps made of polypropylene,



### Intellectual development



manipulation



thinking



### Physical development



pull-up




climbing



Technical drawing of the HIC 99 parking area. The drawing shows an irregularly shaped parking lot with a central rectangular area. Dimensions are provided in meters: total width 532, total height 387, and various internal offsets and widths. The central rectangular area is labeled "HIC 99 16,7 m²". The drawing includes a scale bar and a north arrow.

Length	232 cm
Width	87 cm
Total height	110 cm
Age group	1 - 8 years
Number of users	7 kids
Safety zone	16.7 m2
Free fall height	99 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	8 kg
Dimensions of the largest part	101x12x3 cm
Availability of spare parts	YES
Installation time	4,0 h

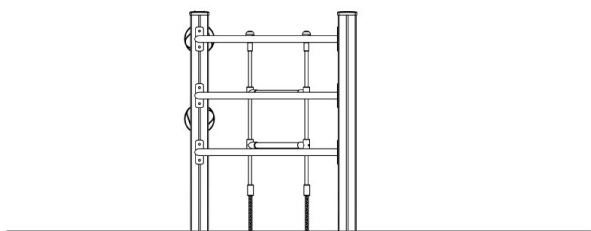

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

30

15



2 / 3

## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		99

## Product technical sheet

# RECYCLED RC1460

### Amount of safe surface corresponding with free fall height:

HIC 99 16,7 m<sup>2</sup>

Data is subject to change without prior notice.

